

## FM-1800ALKE FLAKE ICE MAKER / FM-1800ALKE-N NUGGET ICE MAKER

# **Product Description**

The FM-1800ALKE (-N) is a modular ice maker which produces either Flake or Nugget Ice. This product works in combination with an external compressor and condenser. The Flake and Nugget Ice is popular for a variety of cooling purposes including the display of fish and fresh produce as well as in the medical world for cooling blood and organs.



- Hoshizaki ice makers are micro computer controlled, controlling the ice making process to perform at its best under varying circumstances, without having to make physical adjustments.
- The characteristics of the ice produced by Hoshizaki ice makers means that 'freeze-burn' is no longer an issue when displaying fresh fish or produce.
- Quality stainless steel auger and evaporator increase the life expectancy of these components and the whole ice maker, as well as reducing costly maintenance visits.
- An easily cleanable air filter allows end users to carry out a routine cleaning schedule, extending product life expectancy and reducing the frequency and costs of maintenance call-outs.
- Due to the auger system the water consumption is equal to the ice production.

#### **Available Models**

FM-1800ALKE (Air cooled)	
FM-1800ALKE-N (Air cooled)	

#### Ice

Model	Shape
FM-1800ALKE	Flake
FM-1800ALKE-N	Nugget





### Bins

Model	Type of Bin	Max. Bin Capacity
B-801SA, TK 1800	Modular	348 kg

#### **Production**

Model	Ice Production per 24h	Temperature	Water Consumption per 24h
FM-1800ALKE	Approx. 1800kg	AT.10°C, WT.10°C	Approx. 1,81m³
	Approx. 1560kg	AT.21°C, WT.15°C	Approx. 1,57m³
	Approx. 1335kg	AT.32°C, WT.21°C	Approx. 1,35m³
FM-1800ALKE-N	Approx. 1590kg	AT.10°C, WT.10°C	Approx. 1,60m³
	Approx. 1380kg	AT.21°C, WT.15°C	Approx. 1,39m³
	Approx. 1200kg	AT.32°C, WT.21°C	Approx. 1,21m³










# FM-1800ALKE FLAKE ICE MAKER / FM-1800ALKE-N NUGGET ICE MAKER

#### FM-1800ALKE / FM-1800ALKE-N

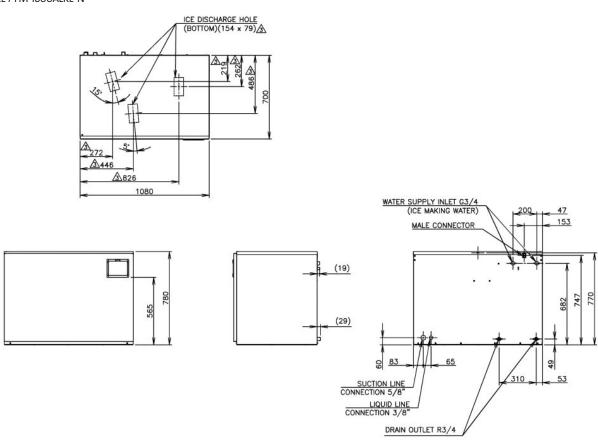

Specification	FM-1800ALKE	FM-1800ALKE-N
Power Supply	1 Phase 220-240V 50Hz Capacity: 1.08kVa (4.74A)	1 Phase 220-240V 50Hz Capacity: 1.08kVa (4.74A)
Amperage (AT.32°C, WT.21°C)	3.7A Starting: 16.5A	3.9A Starting: 16.5A
Electric Consumption	710 W (Power Factor: 83%)	770W (Power Factor: 85%)
Exterior	Stainless Steel, Galvanized Steel (Rear)	Stainless Steel, Galvanized Steel (Rear)
Connections - Water Supply	Direct Connection to Water Main, inlet: G3/4 x 2 (Rear)	Direct Connection to Water Main, inlet: G3/4 x 2 (Rear)
Connections - Drain	Outlet: R3/ 4 x 2 (Rear)	Outlet: R3/ 4 x 2 (Rear)
Ice Making System	Thin ice forming inside Cylinder (Flake Ice)	Thin ice forming inside Cylinder (Nugget Ice)
Evaporator	Tube coiled around Cylinder (Solder Plated)	Tube coiled around Cylinder (Solder Plated)
Refrigerant	R404A	R404A
Ice Making Water Control	Float Switch and Solenoid Valve	Float Switch and Solenoid Valve
Electrical Circuit Protection	Circuit Breaker, Earth Wire	Circuit Breaker, Earth Wire
Refrigerant Circuit Protector	-	-
Mechanism Protection	Micro Switch (Manual-reset)	Micro Switch (Manual-reset)
Interlock	Shutdown by Microprocessor (Manual-reset)	Shutdown by Microprocessor (Manual-reset)
Dimensions Product excl. Packaging	1080 x 700 x 780 (W x D x H, mm)	1080 x 700 x 780 (W x D x H, mm)
Dimensions Product incl. Packaging	1191 x 820 x 947 (W x D x H, mm)	1191 x 820 x 947 (W x D x H, mm)
Weight Gross / Net	155kg / 140kg	155kg / 140kg

Operation Conditions	
Ambient Temperature	5 - 40°C
Water Supply Temperature	5 - 35°C
Water Supply Pressure	0,05-0,8MPa (0,5-8bar)
Voltage Range	Rated Voltage ±10%

Accessories	
Mounting Bracket	Ī
Installation Kit	I

For more information please contact your local sales office:

Hoshizaki Belgium: Hoshizaki Deutschland: Hoshizaki France: Hoshizaki Iberia: Hoshizaki Middle East: info@hoshizaki.be info@hoshizaki.de info@hoshizaki.fr info@hoshizaki.es sales@hoshizaki.ae Hoshizaki Nederland: Hoshizaki United Kingdom: Other countries: sales@hoshizaki.nl uksales@hoshizaki.co.uk sales@hoshizaki.nl