

# AF 157 *XSafe EcoX*

## Self Contained Ice Machine 190 kg

**Scotsman**<sup>®</sup>  
Ice Systems

Item
Project
Quantity



### FEATURES

- Produces granular shape ice flakes, 75% hardness. Ice scoop holder safely positioned in ice-storage bin.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front panel mount ON-OFF Switch.
- Easy, front panel access to technical / service area of the machine.
- Ergonomically designed ice storage access, with disappearing door. Door closing movement dampening system.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.

**CONDENSING SYSTEM**  
air cooled

**REFRIGERANT GAS**  
R290

**VOLTAGE V/HZ/PH**  
230\50\1



### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

#### IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Self Contained Ice Machine 190 kg

August 2025


# AF 157 *XSafe EcoX*

## Self Contained Ice Machine 190 kg

**Scotsman**<sup>®</sup>  
Ice Systems

Item
Project
Quantity

Self Contained Ice Machine 190 kg

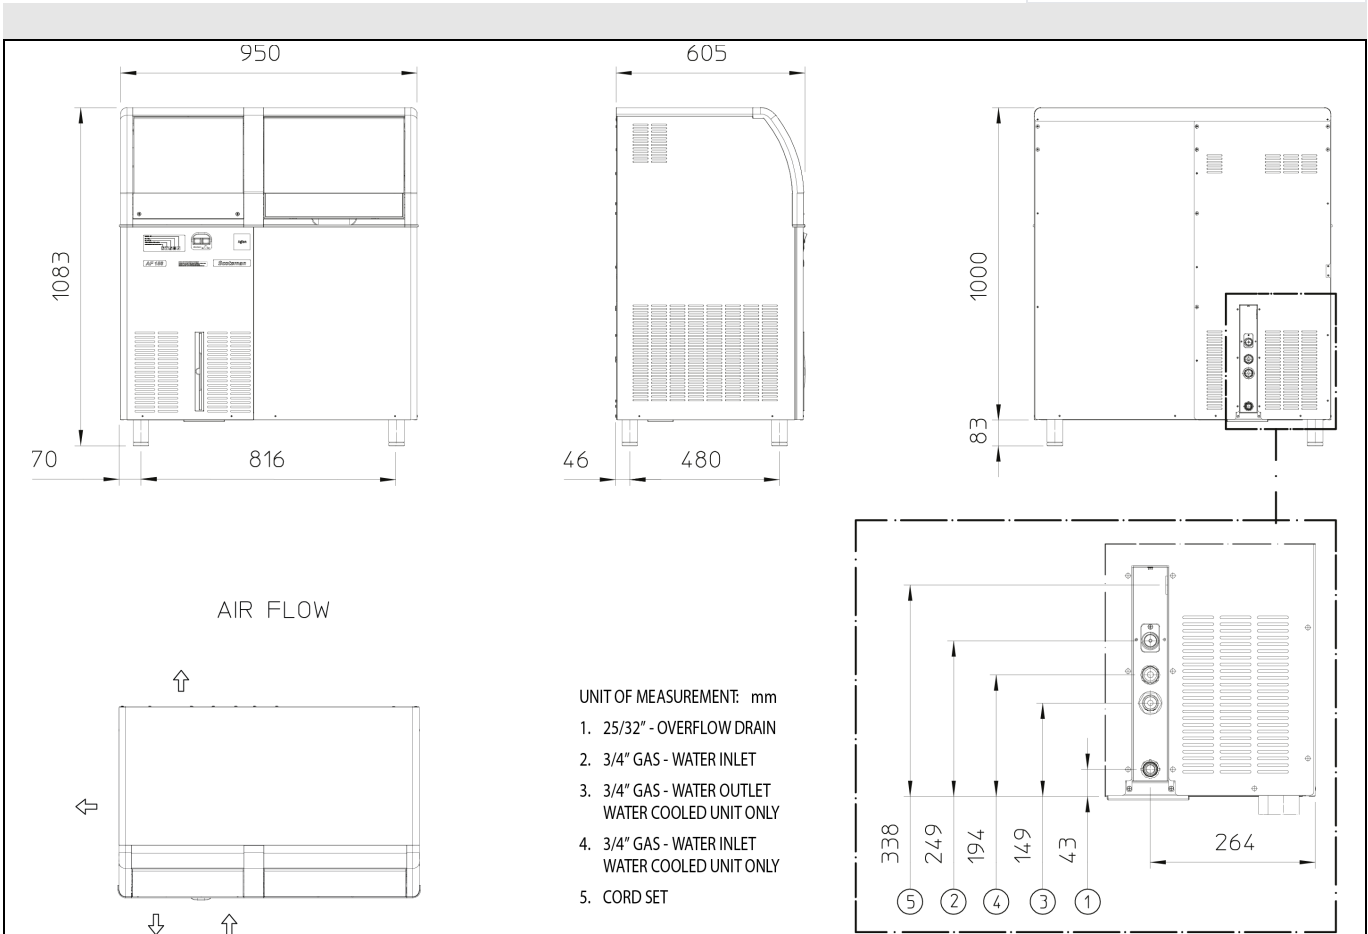

- UNIT OF MEASUREMENT: mm
1. 25/32" - OVERFLOW DRAIN
  2. 3/4" GAS - WATER INLET
  3. 3/4" GAS - WATER OUTLET  
WATER COOLED UNIT ONLY
  4. 3/4" GAS - WATER INLET  
WATER COOLED UNIT ONLY
  5. CORD SET

<b>UNIT DATA</b>			<b>SHIPPING DATA</b>				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)										
Net weight			Gross weight										
950 x 605 x 1.000 mm			1030 x 680 x 117 mm										
76 kg			89kg										
			24 h ice production kg			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
			C Amb. / °C Water										
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/24h	l/h	W	No. x Ømm2	A	
			kg	kg	kg								
AF 157 AS OX	230\50\1	A	190	169	137	60	1,1	13	6	550	3 x 1,5	10	