

EF 107 *XSafe*

Self Contained Ice Machine 130 kg

Scotsman[®]
Ice Systems

Item
Project
Quantity



FEATURES

- Produces granular shape ice flakes, 75% hardness. Ice scoop holder safely positioned in ice-storage bin.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Ergonomically designed ice storage access, with disappearing door. Door closing movement dampening system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE

V/HZ/PH

230\50\1



CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 130 kg

March 2025


EF 107 *XSafe*

Self Contained Ice Machine 130 kg

Scotsman[®]
Ice Systems

Item
Project
Quantity

Self Contained Ice Machine 130 kg

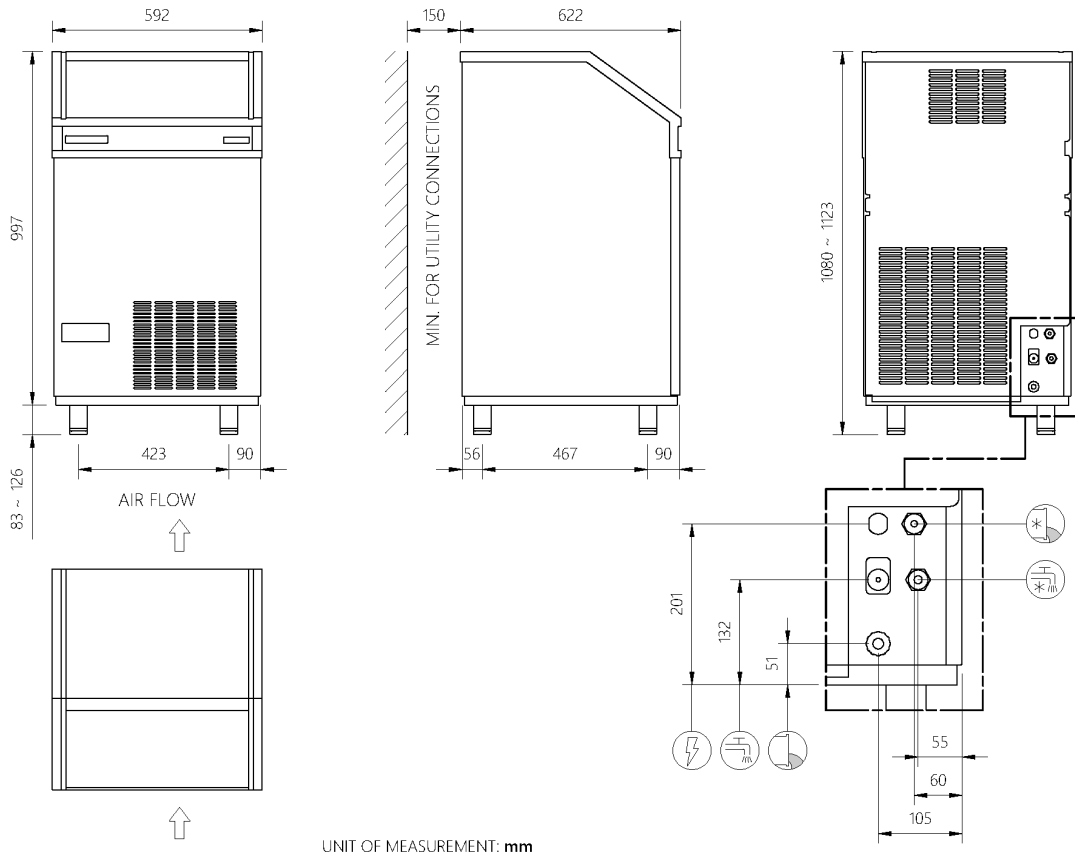

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)										
592 x 622 x 997 mm			670 x 690 x 1180 mm										
Net weight			Gross weight										
68 kg			76kg										
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
Version	Voltage	Condensation	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kg	kW	kWh/ 24h	l/h	W	No. x Ømm ²	A	
EF 107 AS OX	230\50\1	A	130	126	102	30	0,84	9	5	405	3 x 1,5		10