

# MXG 437 XSafe EcoX

## Modular Ice Machine 170 kg

**Scotsman**<sup>®</sup>  
Ice Systems

Item
Project
Quantity



### FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Electronic control board with self diagnostic and malfunction alarms.
- External indicator lights: keeps ice maker's operations under constant surveillance.
- Front access condenser air filter, removable and washable (air cooled version only).
- Clean alert: advises with a blink when it's time to clean the filter.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



**MXG L**  
Large Gourmet 39 g  
Ø 38 mm - H 41 mm



**MXG M**  
Medium Gourmet 20 g  
Ø 30 mm - H 34 mm



**MXG S**  
Small Gourmet 8 g  
Ø 21 mm - H 25 mm

### CONDENSING SYSTEM

air cooled  
water cooled

### RECOMMENDED BIN

BIN

KG

SB393

181

### REFRIGERANT GAS

R290

### VOLTAGE V/HZ/PH

230\50\1

Model	Cube	Ø	H	Weight
MXG L	Large	38 mm	41 mm	39 g
MXG M	Medium	30 mm	34 mm	20 g
MXG S	Small	21 mm	25 mm	8 g

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

#### IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Modular Ice Machine 170 kg

February 2025


# MXG 437 *XSafe EcoX*

## Modular Ice Machine 170 kg

**Scotsman**<sup>®</sup>  
Ice Systems

Item
Project
Quantity

Modular Ice Machine 170 kg

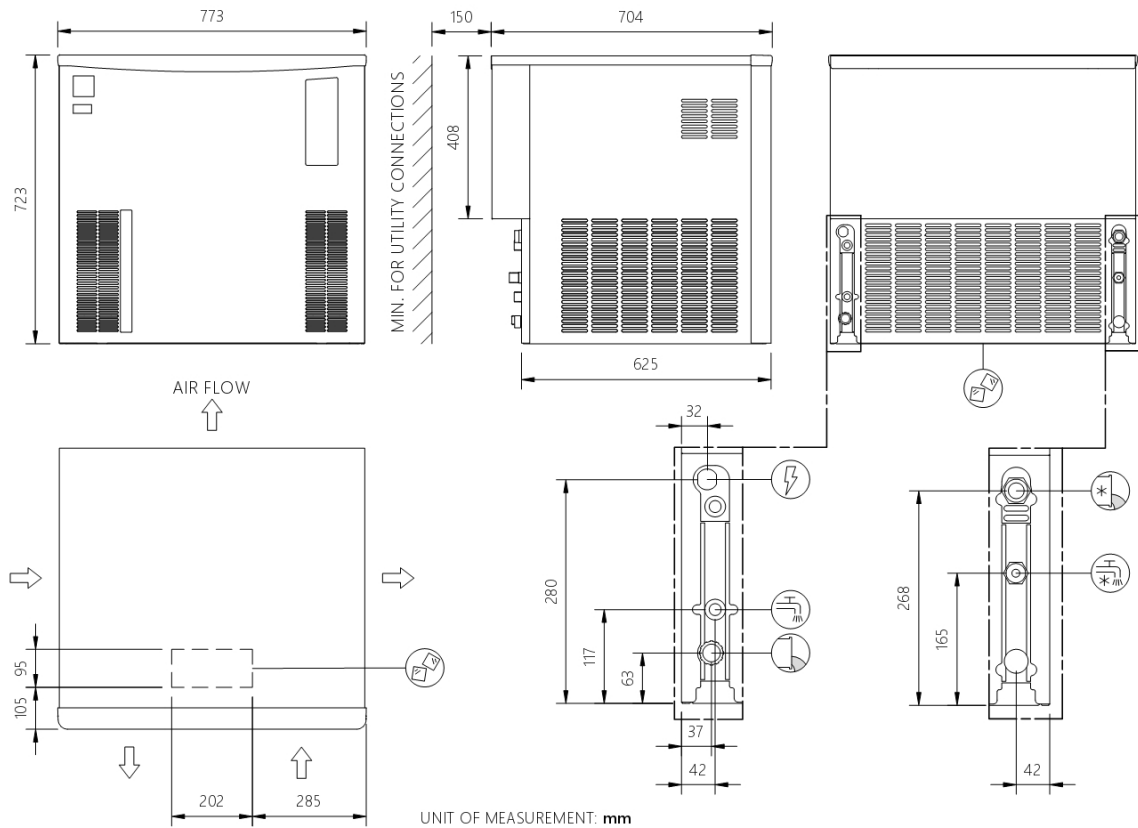

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)									
Net weight			Gross weight									
773 x 704 x 721 mm			830 x 770 x 920 mm									
73 kg			85kg									
			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
Version	Voltage	Condensation	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kW	kWh/ 24h	l/h	W	No. x Ømm <sup>2</sup>	A	
MXG M 437 AS	230\50\1	A	170	165	135	2,8	27	18	1.400	3 x 1,5	16	
MXG M 437 WS	230\50\1	W	170	160	120	3,7	25	99	1.080	3 x 1,5	16	
MXG S 437 AS	230\50\1	A	165	155	135	2,8	26	28	1.400	3 x 1,5	10	
MXG L 437 AS	230\50\1	A	157	160	130	2,8	26	14	1.400	3 x 1,5	10	