

MXF 327 XSafe EcoX

Modular Ice Machine 133 kg

Scotsman
Ice Systems

Item
Project
Quantity



FEATURES

- Top Materials: AISI 304 Stainless steel and new removable grid
- Core Ice System: Stable evaporator system (Axial load).
- New Core Evaporator: Highly balanced auger (double fly system).
- New Gearmotor: Evaporator strability improved and noise free.
- Innovative Ice Breaker: Very dry flake ice - 12% of water contents.
- Durable Operations: High efficiency and better performance.
- Easy to Clean: Facilitated cleaning process and XSafe standard.
- New High-tech Water Sump with easy regulation system.
- New ice level sensor: for seamless operations.
- New Display: Touch & Smart.
- XWave: New App with improved electronics and programming.

CONDENSING SYSTEM

air cooled
water cooled

REFRIGERANT GAS

R290

VOLTAGE

V/HZ/PH

230\50\1

RECOMMENDED BIN

BIN

KG

SB193

129



CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 133 kg

April 2025


MXF 327 *XSafe EcoX*

Modular Ice Machine 133 kg

Scotsman[®]
Ice Systems

Item
Project
Quantity

Modular Ice Machine 133 kg

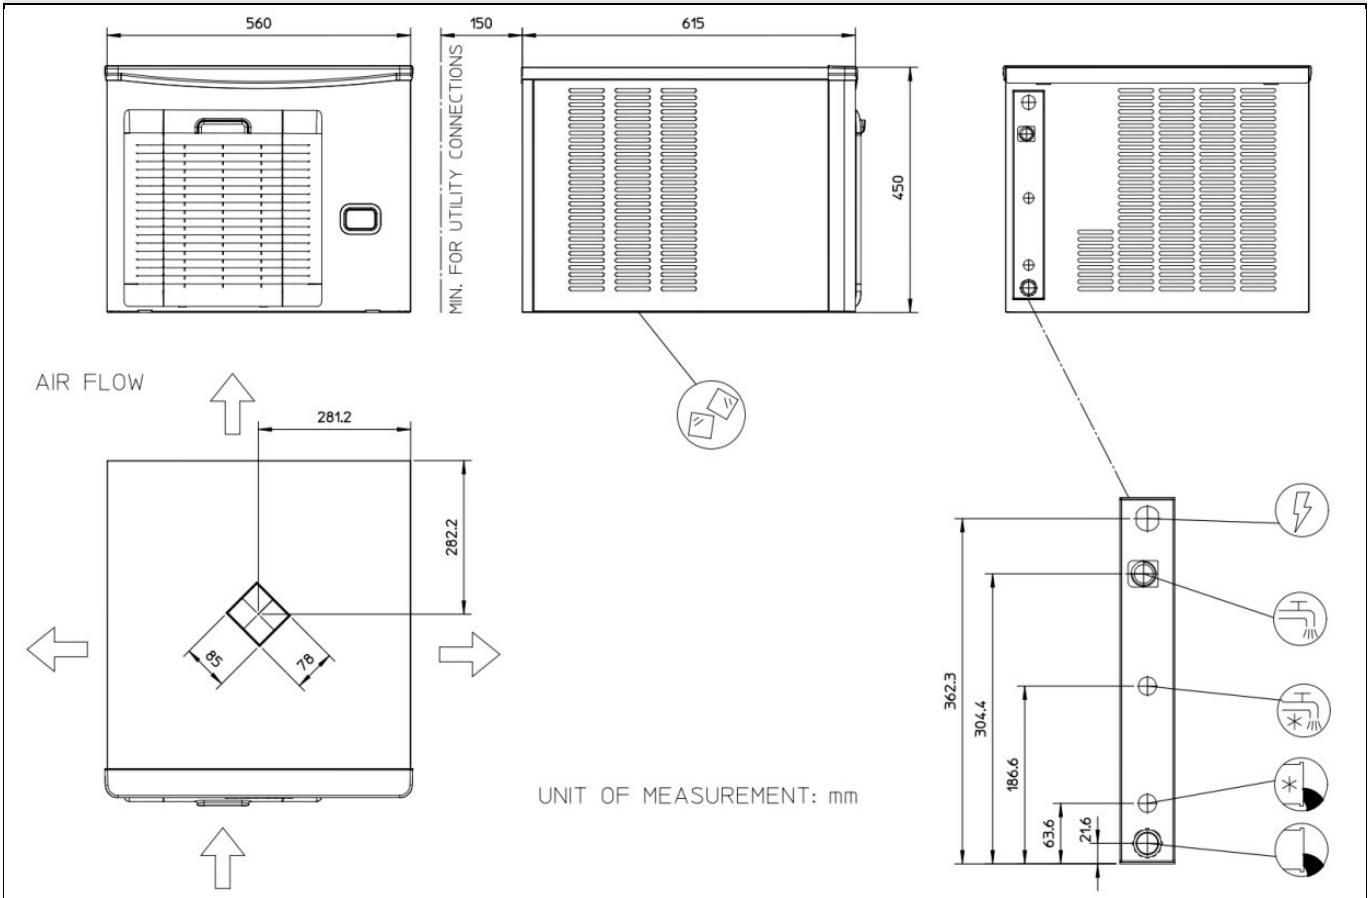

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)		560 x 615 x 450 mm	Size (W x D x H)		630 x 690 x 630 mm							
Net weight		44 kg	Gross weight		54kg							
			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
Version	Voltage	Condensation	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A	
MXF 327 AS OX	230\50\1	A	133	123	90	1,0	11	4	477	3 x 1,5	10	
MXF 327 WS OX	230\50\1	W	125	120	100	1,0	10	43	430	3 x 1,5	10	