

# MXF 1237 *XSafe EcoX*

## Modular Ice Machine 550 kg

**Scotsman**<sup>®</sup>  
Ice Systems

Item
Project
Quantity



### FEATURES

- Top Materials: AISI 304 Stainless steel and new removable grid
- Core Ice System: Stable evaporator system (Axial load).
- New Core Evaporator: Highly balanced auger (double fly system).
- New Gearmotor: Evaporator stability improved and noise free.
- Innovative Ice Breaker: Very dry flake ice - 12% of water contents.
- Durable Operations: High efficiency and better performance.
- Easy to Clean: Facilitated cleaning process and XSafe standard.
- New High-tech Water Sump with easy regulation system.
- New ice level sensor: for seamless operations.
- New Display: Touch & Smart.
- XWave: New App with improved electronics and programming.

### CONDENSING SYSTEM

air cooled  
water cooled



### REFRIGERANT GAS

R290

### VOLTAGE V/HZ/PH

230\50\1  
400\50\3N

### RECOMMENDED BIN

BIN	KG
SB530	243



### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

#### IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Modular Ice Machine 550 kg

April 2025


# MXF 1237 *XSafe EcoX*

## Modular Ice Machine 550 kg

**Scotsman**<sup>®</sup>  
Ice Systems

Item
Project
Quantity

Modular Ice Machine 550 kg

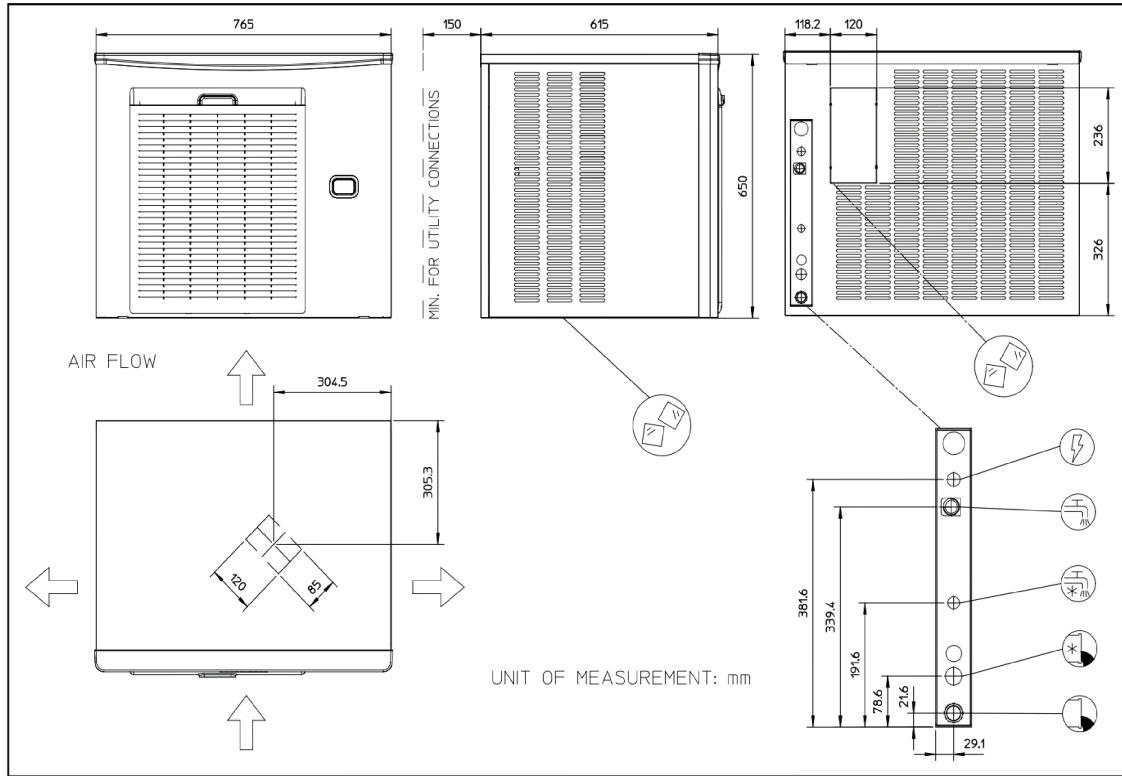

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)									
Net weight			Gross weight									
765 x 615 x 650 mm			830 x 690 x 830 mm									
85 kg			97kg									
			24 h ice production kg			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
			C Amb. / °C Water									
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm <sup>2</sup>	A	
			kg	kg	kg							
MXF 1237 AS OX	230\50\1	A	550	480	360	4,3	45	16	2.050	3 x 2,5	16	
MXF 1237 WS OX	230\50\1	W	550	520	450	3,8	37	157	1.560	3 x 1,5	16	
MXF 1237 AS OX	400\50\3N	A	540	473	370	4,0	43	16	1.960	5 x 1,5	16	